

BrightSign® XT5

Built for prime performance
and endless innovation



BrightSign XT5 elevates signage experiences with a perfect blend of motion graphics power, cutting-edge video performance, and connections that maximize efficiency to future-proof your investment.

Live TV Integrations

Seamlessly blend broadcasts into signage.



- Effortless live TV with an HDMI In
- Seamless integration of live video
- Simple input switching

Dual Screen Deployments

Efficient dual screen deployments.



- Simplified dual screen setups
- Flexible content per display
- Efficient slim design with PoE+

Realistic Visual Experiences

Stunning clarity and vivid colors.



- Stunning video up to 8K
- Vibrant colors in 10-bit HDR
- Crystal clear 4K graphics

Dynamic Dashboards

Powerful 3D data visualizations.



- Live 3D data visualizations
- Responsive multi-touch infographics
- Ultra-smooth animated dashboards



XT245

Standard I/O Package

Delivers robust 3D motion graphics in 4K and vibrant HDR video from Full HD to breathtaking 8K.



XT1145

Expanded I/O Package

Enables live video playback via an HDMI input and expands engagement options with USB and serial connections.



XT2145

Expanded Multiplex I/O Package

With an ultra-thin design, this device delivers robust 3D motion graphics in 4K, vibrant HDR video from Full HD to breathtaking 8K, and Power over Ethernet.

The BrightSign XT5 Advantage

- Attract attention with live video that easily integrates TV broadcasts and camera feeds into signage
- Simplify and save on 2-screen setups with a single player featuring dual outputs and powered over Ethernet
- Gain immediate insights into complex data trends with responsive and engaging live 3D visualizations
- Command attention with ultra-bright and vivid Full HD to 8K video and crystal-clear 4K graphics
- Maximize efficiency with simple dual-screen creation tools and consolidated single-player distribution
- Operate with unparalleled reliability, security, and sustainability on BrightSignOS™
- Reduce total cost of ownership with complimentary remote player management and controls
- Achieve CMS choice flexibility with a trusted global network of leading integrated partner solutions

BrightSignOS™

The power of purple.

The only purpose-built operating system that brings unrivaled reliability, security, signage power and sustainability to every BrightSign player.



SECURE

Unrivaled security that reduces risk to near zero with purpose-built file system designed to remove vulnerabilities and only runs signage.

- Exceptionally protected operating system with a secure digital signature
- Runs a singular signage application to protect against viruses
- Configurable to any type of security profile
- Security extends to integrated CMS solutions



RELIABLE

Legendary reliability with unmatched uptimes and a lower total cost of ownership.

- Persistent self-healing protocols resulting in unmatched uptimes
- Secure built-in remote player management and monitoring
- Remote diagnostics and controls to reduce costly on-site visits
- Removable storage that avoids rip/replace situations



SUPERIOR

Superior signage performance for simple to sophisticated experiences.

- Optimized to run cutting-edge video and motion graphics
- Abundant signage features available with free authoring software
- Integrated with hundreds of global CMS solutions
- Highly extensible to securely run specialized signage technologies



SUSTAINABLE

Unmatched sustainability through updates that stay ahead of market demands.


- Low power requirements with high performance
- Guaranteed long life cycle support for unprecedented longevity
- Free updates applied on-demand and consistent across hardware generations
- Remote re-provisioning at any time to ensure flexibility

Invest in BrightSignOS to achieve long-term success

Designed to reduce risk and save on signage.

Downtime is the most expensive investment in signage that often gets overlooked. Failure doesn't happen at implementation, it happens after. BrightSignOS™ is designed to solve and mitigate ongoing risks to avoid rip and replace situations resulting in huge savings throughout the long life of your player.

TOTAL COST OF OWNERSHIP

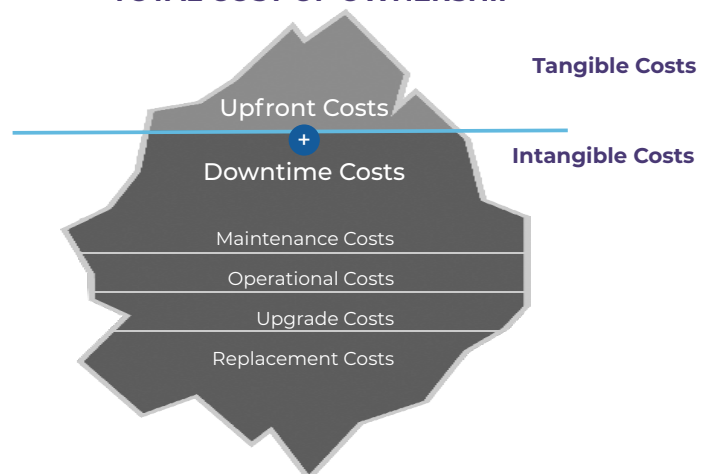


Hardware Specifications

Front View



Rear View

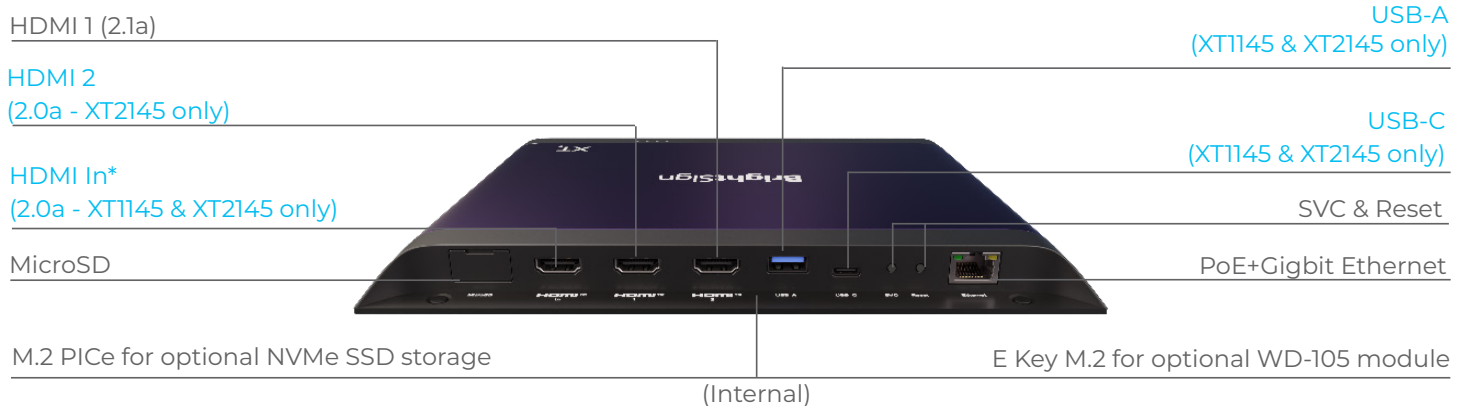

- USB Type C port: supports high-speed host mode & provides 5V/1A power to peripheral devices
- USB Type A port: provides 5V/1A power to peripheral devices
- GPIO port: 8 bi-directional GPIOs
- Audio port: supports analog & SPDIF digital
- Real time clock: 14-day life

*HDCP support coming soon in a future BrightSignOS update

Software

BSN.cloud

The secure and scalable cloud infrastructure that connects BrightSign players to a comprehensive suite of integrated services to manage devices, content, and networks.

bsn.Control

Free remote access and control service for BrightSign players, offering efficient multi-device monitoring and management while seamlessly integrating with your preferred CMS.



Integrated CMS Choices

Unmatched freedom of choice with a trusted global network of integrated solutions that seamlessly support BrightSign players and the bsn.Control service.

bsn.Content

Paid subscription-based service for content management and distribution with multi-device monitoring, controls, and advanced networking tools using BrightAuthor:connected to administer large deployments in the cloud.



Technical Specifications

| | XT245 | XT1145 | XT2145 |
|--|--|-------------------------------------|---|
| I/O Package | Standard | Expanded | Multiplex |
| VIDEO & HTML5 ENGINES | | | |
| Single 8K60p video decoding | X (10-bit) | X (10-bit) | X (10-bit) |
| 4K60p video decoding | Dual (10-bit) | Dual (10-bit) | Dual (10-bit) |
| HDR10, HLG & Rec.2020/BT.2020 Support | X | X | X |
| 4K video rotation | X | X | X |
| 4K Full Resolution Images & Graphics | X | X | X |
| HTML5 Performance | 3D WebGL & real time data visualization | Intense graphics, video and live TV | Dual HTML presentations driving 2 screens |
| HTML support: HTML5, CSS, JavaScript, SVG, WebGL, and Chromium compatible | X | X | X |
| MEDIA FORMATS | | | |
| 8K video codecs: H.265/HEVC, VP9 | X | X | X |
| 8K Video Containers: .MP4, .MOV, .MKV, .WEBM, .TS, .MPG, .MPEG, .PS, .M2P, .MPV, .AVI, .HEVC, .H264, .AV1, .VP9, and .MJPG | X | X | X |
| 4K Video codecs: H.265/HEVC, H.264/AVC, AV1, VP9, MPEG 4 part 2, MPEG1 video, MPEG2 video, or MJPEG video | X | X | X |
| 4K Video Containers: .MP4, .MOV, .MKV, .WEBM, .TS, .MPG, .MPEG, .PS, .M2P, .MPV, .AVI, .HEVC, .H264, .AV1, .VP9, and .MJPG | X | X | X |
| Full HD Video Codecs: H.265/HEVC, H.264/AVC, AV1, VP9, MPEG 4 part 2, MPEG1 video, MPEG2 video, or MJPEG video | X | X | X |
| Full HD Video Containers: H.265/HEVC, H.264/AVC, AV1, VP9, MPEG 4 part 2, MPEG1 video, MPEG2 video, or MJPEG video | X | X | X |
| Images: BMP, JPEG, PNG up to 8K resolution | X | X | X |
| Audio: MP2, MP3, AAC and WAV (AC3 is passed through) | X | X | X |
| DISPLAY RESOLUTIONS | | | |
| Supports all common screen resolutions up to 8K (7680x4320 @60fps) | X | X | X |
| Supports additional & customizable display resolutions with unique aspect ratios | X | X | X |
| ACCESSORIES | | | |
| BP200 & BP900 USB Button Pads | | X | X |
| WD-105 Dual Antenna Wireless/Bluetooth Module | X | X | X |
| MicroSD Class 10 Cards (various capacities) | X | X | X |
| 256GB PCIe NVMe M.2 SSD | X | X | X |
| BrightSign Mobile USB Modem & Service | | X | X |
| MISCELLANEOUS | | | |
| Operating Temperature Range | -10°C to 50°C at 90% maximum relative humidity, non-condensing | | |
| Dimensions (W x D x H) | 238.62 x 185.90 x 19.19mm | | |
| Shipping Weight / Player Weight | 1.41 kg / 0.68 kg | | |
| Locking Power Supply | 12V / 3A | | |
| Multi-Country Power & Regulatory Approvals | X | X | X |
| Built-in Wall Mounting | X | X | X |
| 1 Year Warranty, parts and labor* | X | X | X |
| MSRP | \$800 | \$900 | \$1100 |

*2 year warranty, parts and labor, for units shipped from an EU or UK distribution center and to an EU or UK address.

Contact us at sales@brightsign.biz
www.brightsign.biz

Copyright © 2024 by BrightSign, LLC. All rights reserved. BrightSign and the BrightSign logo are registered trademarks of BrightSign, LLC. The products shown here are covered by U.S. and/or foreign patent rights. See www.brightsign.biz/patents for more information. Other brand and product names are trademarks or registered trademarks of their respective holders. DOC-06-07-2024